



# Full-Black Series

## D6 II · 350-370W MWT All Black Module Mono Half-cut 63 Cells

### 20.6%

Module efficiency up to 20.6%

### Full Black Series MWT PV Module


- Full Black**  
All black design for more elegant rooftop
- High Efficiency**  
MWT back contact cell and modules with busbar-free design and higher efficiency
- High Reliability**  
Conductive back sheet 2D encapsulation without soldering, resulted lower degradation under multiple extreme testing condition
- Superior Warranty**  
The only single-glass module with 30-year power warranty by LLOYD'S& PICC worldwide
- High ROI**  
Higher return of investment with higher power output
- Lead Free**  
Eco-friendly PV design achieves Lead-free without soldering materials

### Reinsurance Coverage for 30 Years

**12 year**  
Quality  
Warranty

**30 year**  
Performance  
Warranty

Insured by PICC and LLOYD'S

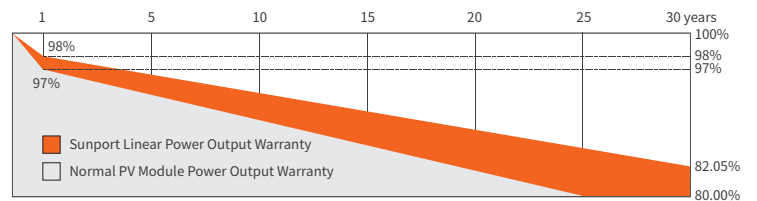

※1st year degradation less than 2%, 30 years linear power output 82% guaranteed.

### Comprehensive Qualifications & Certifications

- ★CQC Top Runner Advanced Technology Certification (4A class)
- ★TUV NORD Certification
- ★ISO 9001:2015 Quality Management System
- ★ISO 14001:2015 Environment Management System
- ★ISO 45001: 2018 Occupation Health Safety Management System
- ★TUV NORD Certification



Jiangsu Sunport Power Corp.,Ltd

Add: No.20, Xishi Road, Xinwu District, Wuxi, China 214028

Email: info@sunportpower.com

Web: www.sunportpower.com

## Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP350NHEH	SPP355NHEH	SPP360NHEH	SPP365NHEH	SPP370NHEH
Max-Power(Pm)	W	350	355	360	365	370
Power Tolerance	W			0~+5		
Max-Power Voltage(Vm)	V	35.1	35.3	35.5	35.7	35.9
Max-Power Current(I <sub>m</sub> )	A	9.98	10.06	10.14	10.23	10.31
Open-Circuit Voltage(V <sub>oc</sub> )	V	42.4	42.6	42.8	43.0	43.2
Short-Circuit Current(I <sub>sc</sub> )	A	10.45	10.53	10.62	10.70	10.78
Module Efficiency(η <sub>m</sub> )	%	19.4	19.7	20.0	20.3	20.6

STC: AM=1.5, Irradiation 1000W/m<sup>2</sup>, Module Temperature 25°C

## Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP350NHEH	SPP355NHEH	SPP360NHEH	SPP365NHEH	SPP370NHEH
Max-Power(Pm)	W	262	266	270	274	278
Max-Power Voltage(Vm)	V	32.3	32.5	32.7	32.9	33.1
Max-Power Current(I <sub>m</sub> )	A	8.12	8.20	8.26	8.33	8.40
Open-Circuit Voltage(V <sub>oc</sub> )	V	39.6	39.8	40.0	40.2	40.4
Short-Circuit Current(I <sub>sc</sub> )	A	8.63	8.70	8.77	8.84	8.90

NMOT: Irradiation 800W/m<sup>2</sup>, ambient temperature 20°C, Wind Speed 1m/s

## Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of P <sub>max</sub>	-0.36%/°C
Temperature coefficient of V <sub>oc</sub>	-0.28%/°C
Temperature coefficient of I <sub>sc</sub>	0.06%/°C

## Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HC	806/858	31

## Mechanical Characteristics


Dimension(L×W×H)	1772mmx1016mmx35mm
Weight	20kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass /3.2mm
Solar Cell	126(6×21) / Mono / 162.75mm (Half-cell)
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Black
Junction Box	IP67 / IP68
Cable	4mm <sup>2</sup> , 350mm (+) / 150mm (-); Customizable
Connector	MC4 Compatible

## Operating Conditions


Max System Voltage	1500V(TUV)
Max Fuse Rated Current	15A
Operating Temperature Range	-40°C~+85°C
Mechanical Load	5400Pa (front) /2400Pa (rear)
Max Allowable Hail Load	φ25mm hail, from 1m of distance at 23 m/s
Application Class	Class A

## I-V Curve

I-V Curve at different irradiation (SPP365NHEH)

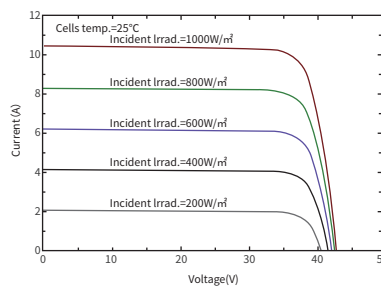

I-V Curve at different irradiation (SPP360NHEH)

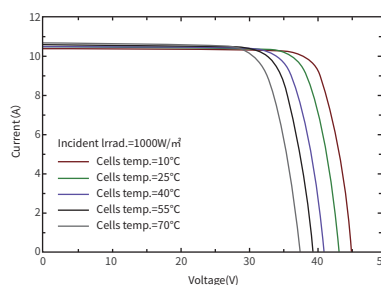

## Module Size

