

Classic Series

C 7 III · 415-435W MWT Mono PERC Half-Cut Module

21.3%

Module efficiency up to 21.3%

Features


- Aesthetic Design**
 The design of busbar and tapping ribbon free makes module more aesthetic
- High Efficiency**
 Busbar-free design increases cell conversion efficiency, more power output can be achieved at low irradiance conditions
- Innovative Layout**
 Innovative back contact module layout with asymmetric design for higher efficiency power
- High Reliability**
 Conductive back sheet's 2D encapsulation avoids welding stress and micro crack, resulting lower degradation under multiple harsh testing conditions
- High ROI**
 Single-glass modules with global 30-year performance warranty bring higher return on investment
- Lead Free**
 Eco-friendly PV design achieves lead-free MWT module without soldering materials

Reinsurance Coverage for 30 Years

15 year
Quality Warranty

30 year
Performance Warranty

Insured by PAIC and LLOYD'S
PING AN LLOYD'S

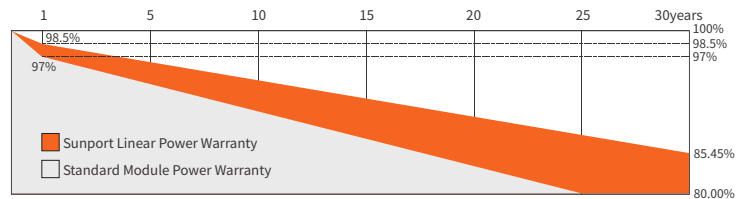

※1st year degradation less than 1.5%, 30 years linear power output 85.45% guaranteed.

Comprehensive Qualifications & Certifications

- ★ ISO 9001: 2015 Quality Management System
- ★ ISO 45001: 2018 Occupation Health Safety Management System
- ★ ISO 14001: 2015 Environment Management System
- ★ CQC Top Runner Advanced Technology Certification (4A class)
- ★ TUV NORD Certification



Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP415QHGH	SPP420QHGH	SPP425QHGH	SPP430QHGH	SPP435QHGH
Max-Power(Pm)	W	415	420	425	430	435
Power Tolerance	W			0~+5		
Max-Power Voltage(Vm)	V	39.2	39.4	39.6	39.8	40.0
Max-Power Current(I _m)	A	10.59	10.66	10.73	10.80	10.88
Open-Circuit Voltage(Voc)	V	47.0	47.2	47.4	47.6	47.8
Short-Circuit Current(I _{sc})	A	11.18	11.26	11.34	11.42	11.50
Module Efficiency(η _m)	%	20.3	20.6	20.8	21.1	21.3

STC: AM=1.5, Irradiation 1000W/m², Module Temperature 25°C Power Production Tolerance ±3%

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP415QHGH	SPP420QHGH	SPP425QHGH	SPP430QHGH	SPP435QHGH
Max-Power(Pm)	W	305	309	313	317	321
Max-Power Voltage(Vm)	V	36.4	36.6	36.8	37.0	37.2
Max-Power Current(I _m)	A	8.38	8.44	8.51	8.57	8.63
Open-Circuit Voltage(Voc)	V	43.7	43.9	44.1	44.3	44.5
Short-Circuit Current(I _{sc})	A	9.05	9.11	9.17	9.23	9.30

NMOT: Irradiation 800W/m², Ambient temperature 20°C, Wind Speed 1m/s

Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of P _{max}	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of I _{sc}	0.06%/°C

Mechanical Characteristics

Dimension(L×W×H)	1973mmx1035mmx35mm
Weight	21.5kg
Glass type	High transmittance anti-reflective coated tempered glass /3.2mm
Cell	138(23x6) / Mono / Half-cell
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction box(Protection degree)	IP68
Cable	4mm ² ,350mm(+)/150mm(-) or Customized•Length
Connector	MC4 Compatible


Operating Conditions

Max. system voltage	DC1500V(IEC)
Max. series fuse rating	20A
Operating temperature range	-40°C~+85°C
Mechanical load	5400Pa/2400Pa
Max. hailstone impact(diameter/velocity)	Φ25mm hail, from 1 m of distance at 23 m/s
Application Class	Class A

Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HQ	682	31

I-V Curve

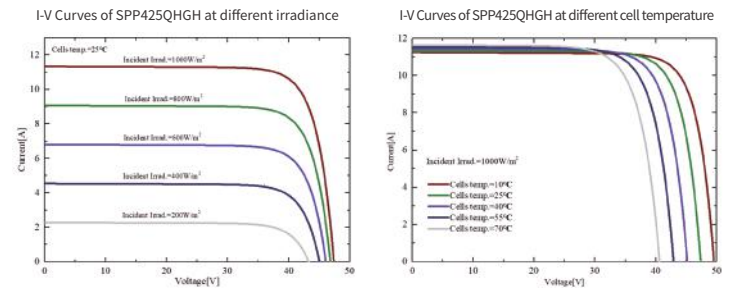

Module Size

